



BMPP – SERIES Box Type- Metallized Polypropylene Film Capacitor

1. Construction

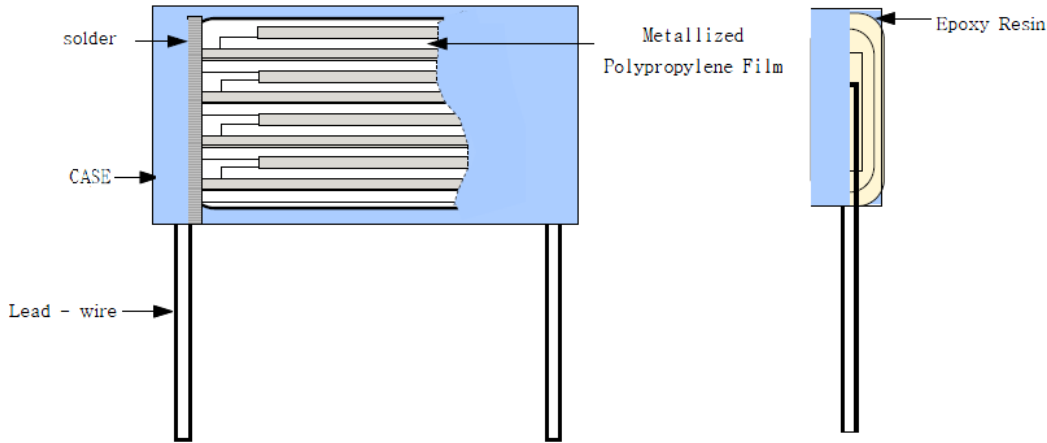

- 1 Rated Voltage: 100VDC / 250VDC / 400VDC / 630VDC
- 2 Capacitance Range: 0.047uF ~ 3.5uF (473~355)
- 3 Operating temperature : -25°C ~ +105°C


2. Dimension

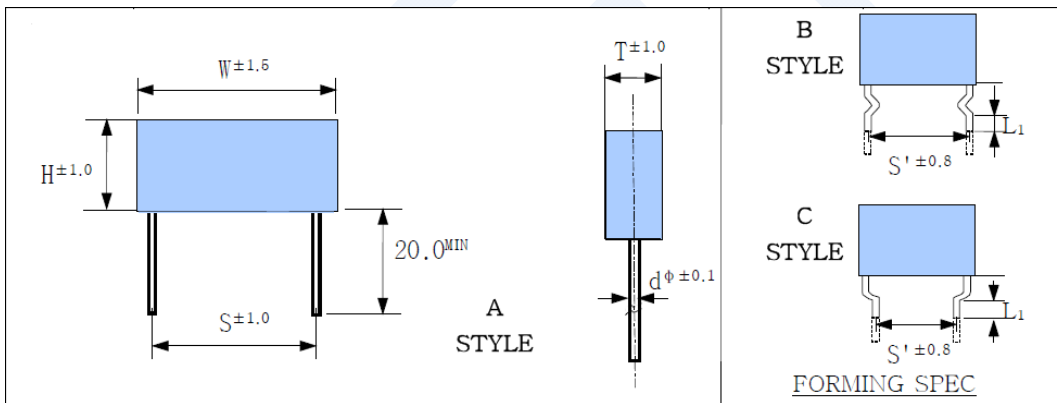

3. Type Designation

3.Type Designation

BMPP 400V 474 K 22 S

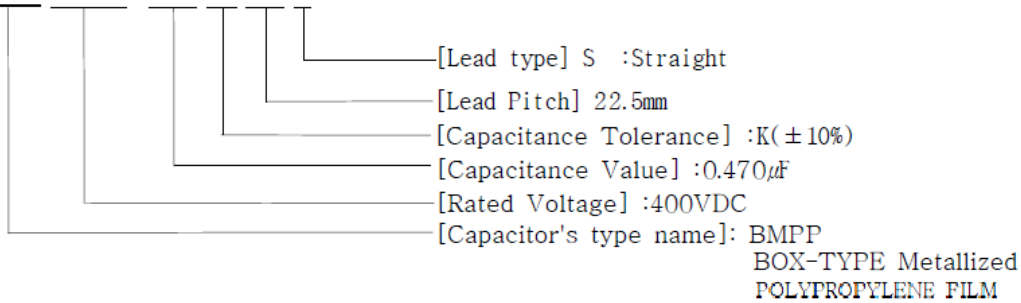

BMPP – SERIES Box Type- Metallized Polypropylene Film Capacitor

下述規格為一般常用規格，若不符合您的需求請隨時與我們連絡!

CAPACITANCE (μF)	CODE	100V DC					250V DC					400V DC					630V DC				
		W	H	T	P	d(Φ)	W	H	T	P	d(Φ)	W	H	T	P	d(Φ)	W	H	T	P	d(Φ)
0.047	473						19	15	7.5	15	0.8	19	13	8	15	0.8	19	13	7.5	15	0.8
0.056	563						19	15	7.5	15	0.8	19	14	8	15	0.8	19	14	8	15	0.8
0.068	683						19	15	8	15	0.8	19	15	9	15	0.8	19	15	8.5	15	0.8
0.082	823						19	15	8.5	15	0.8	19	16	10	15	0.8	19	16	9.5	15	0.8
0.1	104	16	13	6.5	14	0.6	19	16	6	15	0.8	19	14	9	15	0.8	26	16	8.5	23	0.8
0.12	124	16	13	6.5	14	0.6	19	16	6.5	15	0.8	19	14	10	15	0.8	26	18	9	23	0.8
0.15	154	16	14	7	14	0.6	19	17	7	15	0.8	19	15	10	15	0.8	26	16	8.5	23	0.8
0.18	184	16	15	7.5	14	0.6	19	17	8	15	0.8	19	16	11	15	0.8	26	19	11	23	0.8
0.22	224	19	13	6.5	15	0.8	19	18	8	15	0.8	19	18	11	15	0.8	26	21	12	23	0.8
0.27	274	19	14	7	15	0.8	19	18	9	15	0.8	26	18	10	23	0.8	26	22	13	23	0.8
0.33	334	19	15	7	15	0.8	19	18	9.5	15	0.8	26	19	11	23	0.8	26	23	15	23	0.8
0.39	394	19	15	8	15	0.8	19	18	9.5	15	0.8	26	20	12	23	0.8	26	24	16	23	0.8
0.47	474	19	15	8.5	15	0.8	26	17	10	23	0.8	26	22	13	23	0.8	31	24	16	27	0.8
0.56	564	19	16	10	15	0.8	26	17	10	23	0.8	26	23	14	23	0.8	31	26	17	27	0.8
0.68	684	19	17	11	15	0.8	26	19	11	23	0.8	26	24	15	23	0.8	31	27	19	27	0.8
0.82	824	19	18	12	15	0.8	26	19	12	23	0.8	26	25	16	23	0.8	31	29	20	27	0.8
1	105	19	19	13	15	0.8	26	20	13	23	0.8	31	25	17	27	0.8					
1.2	125	26	19	12	23	0.8	26	21	14	23	0.8	31	27	19	27	0.8					
1.5	155	26	20	13	23	0.8	26	23	15	23	0.8	31	29	21	27	0.8					
1.8	185	26	21	14	23	0.8	31	22	14	23	0.8										
2.2	225	26	22	15	23	0.8	31	23	15	23	0.8										
2.5	255	26	23	16	23	0.8	31	24	16	23	0.8										
2.7	275	31	23	15	27	0.8	31	25	17	23	0.8										
3.3	335	31	24	16	27	0.8	31	26	18	23	0.8										
3.5	355	31	25	17	27	0.8	31	27	19	23	0.8										