



BMPE – SERIES Box Type- Metallized Polyester Film Capacitor

1. Construction

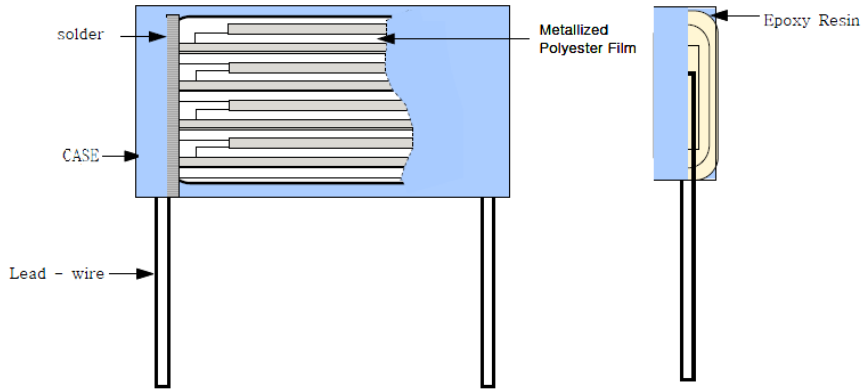

- 1 Rated Voltage: **100VDC / 250VDC / 400VDC / 630VDC**
- 2 Capacitance Range: **0.01uF ~ 10.0uF (103~106)**
- 3 Operating temperature : **-25°C ~ +85°C**

2. Dimension

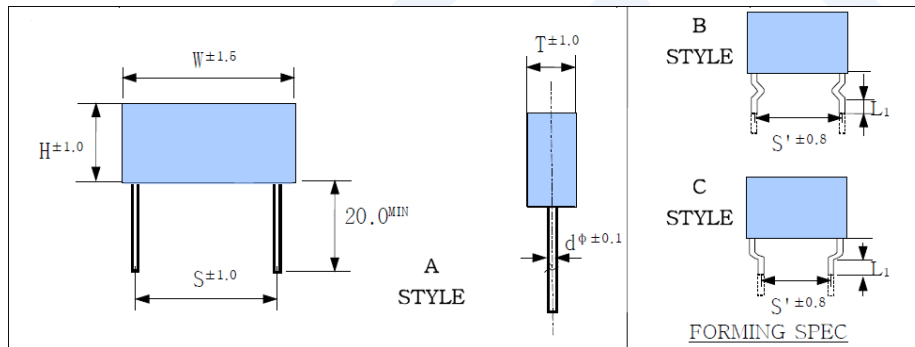

3. Type Designation

3.Type Designation

BMPE	400V	474	K	22	S	
						[Lead type] S :Straight
						[Lead Pitch] 22.5mm
						[Capacitance Tolerance] :K(±10%)
						[Capacitance Value] :0.470μF
						[Rated Voltage] :400VDC
						[Capacitor's type name]: BMPE
						BOX-TYPE Metallized Polyester Film

FILM Capacitor

下述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

CAPACITANCE (μ F)	CODE	100V DC					250V DC					400V DC					630V DC				
		W	H	T	P	d(Φ)	W	H	T	P	d(Φ)	W	H	T	P		W	H	T	P	d(Φ)
0.01	103						13	10	5	10	0.6	13	10	5	10	0.6	13	10	5	10	0.6
0.012	123						13	10	5	10	0.6	13	10	5	10	0.6	13	10	5	10	0.6
0.015	153						13	10	5	10	0.6	13	10	5	10	0.6	13	10	5.5	10	0.6
0.018	183						13	10	5	10	0.6	13	10	5	10	0.6	13	10	6	10	0.6
0.022	223						13	10	5	10	0.6	13	10	5	10	0.6	13	11	6.5	10	0.6
0.027	273						13	10	5	10	0.6	13	10	5	10	0.6	13	11	6.5	10	0.6
0.033	333						13	10	5	10	0.6	13	11	6	10	0.6	19	12	5.5	15	0.8
0.039	393						13	10	5	10	0.6	13	11	6	10	0.6	19	12	6	15	0.8
0.047	473						13	10	5	10	0.6	13	11	6	10	0.6	19	12	6.5	15	0.8
0.056	563						13	10	5	10	0.6	19	11	5	15	0.8	19	13	7	15	0.8
0.068	683						13	10	5	10	0.6	19	12	5	15	0.8	19	13	7.5	15	0.8
0.082	823						13	10	5	10	0.6	19	12	6	15	0.8	19	14	8	15	0.8
0.1	104	13	10	5	10	0.6	13	11	5.5	10	0.6	19	13	6	15	0.8	19	15	8.5	15	0.8
0.12	124	13	10	5	10	0.6	13	12	6	10	0.6	19	13	6	15	0.8	19	16	9	15	0.8
0.15	154	13	10	5	10	0.6	13	12	6	10	0.6	19	14	7	15	0.8	26	16	8	23	0.8
0.18	184	13	10	5.5	10	0.6	13	12	6	10	0.6	19	14	7	15	0.8	26	17	8.5	23	0.8
0.22	224	13	11	6	10	0.6	13	12	6	10	0.6	19	15	8	15	0.8	26	17	9	23	0.8
0.27	274	13	12	6.5	10	0.6	13	12	6.5	10	0.6	26	15	8	23	0.8	26	18	10	23	0.8
0.33	334	13	12	7	10	0.6	13	13	7	10	0.6	26	16	9	23	0.8	26	19	11	23	0.8
0.39	394	13	13	7.5	10	0.6	19	14	7	15	0.8	26	17	10	23	0.8	31	19	12	27	0.8
0.47	474	14	13	8	10	0.6	19	15	7.5	15	0.8	26	17	10	23	0.8	31	20	13	27	0.8
0.56	564	14	14	8.5	10	0.6	19	15	8	15	0.8	31	18	10	27	0.8	31	21	14	27	0.8
0.68	684	19	13	7.5	15	0.8	19	16	8.5	15	0.8	31	19	11	27	0.8	31	22	15	27	0.8
0.82	824	19	14	8	15	0.8	26	14	8	23	0.8	31	20	13	27	0.8	31	23	16	27	0.8
1	105	19	14	8.5	15	0.8	26	15	8.5	23	0.8	31	21	14	27	0.8	31	25	16	27	0.8
1.2	125	19	15	9.5	15	0.8	26	16	9	23	0.8	31	22	15	27	0.8					
1.5	155	19	16	10	15	0.8	26	17	9.5	23	0.8	31	24	15	27	0.8					
1.8	185	26	16	9	23	0.8	26	18	10	23	0.8	31	26	16	27	0.8					
2.2	225	26	17	10	23	0.8	26	19	11	23	0.8	31	27	16	27	0.8					
2.5	255	26	18	11	23	0.8	31	18	12	27	0.8										
2.8	285	26	19	12	23	0.8	31	19	12	27	0.8										
3.3	335	26	20	13	23	0.8	31	20	13	27	0.8										
3.5	355	26	21	14	23	0.8	31	21	13	27	0.8										
3.8	385	31	20	11	27	0.8	31	22	14	27	0.8										
4.7	475	31	21	12	27	0.8	31	23	14	27	0.8										
5.6	565	31	22	13	27	0.8															
8.2	825	31	23	14	27	0.8															
10	106	31	24	15	27	0.8															

