



FMPE(R) – SERIES Round Type- Metallized Polyester Film Capacitor

1. Construction

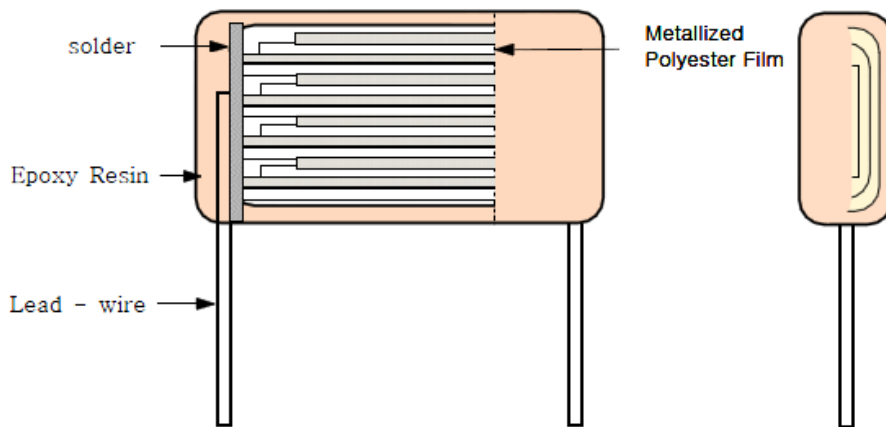


- 1 Rated Voltage: **450VDC**
- 2 Capacitance Range: **0.47uF ~ 2.2uF (474~225)**
- 3 Self Heating Temperature : The maximum allowable rise is **10°C**
- 4 Operating temperature : **-40°C ~ +85°C (+85°C ~ +110°C Derate Voltage)**

2. Reducing rated voltage for temperature

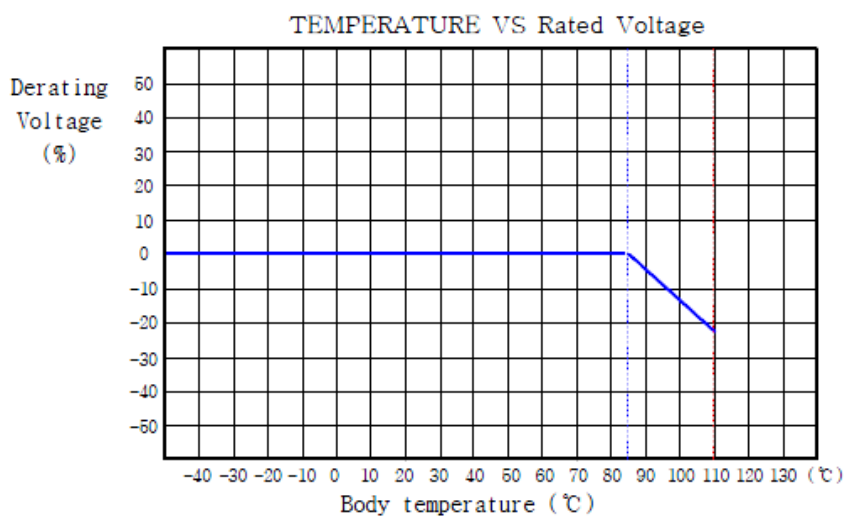

FMPE(R) – SERIES Fuse Type-Metallized Polyester Film Capacitor

3. Dimension

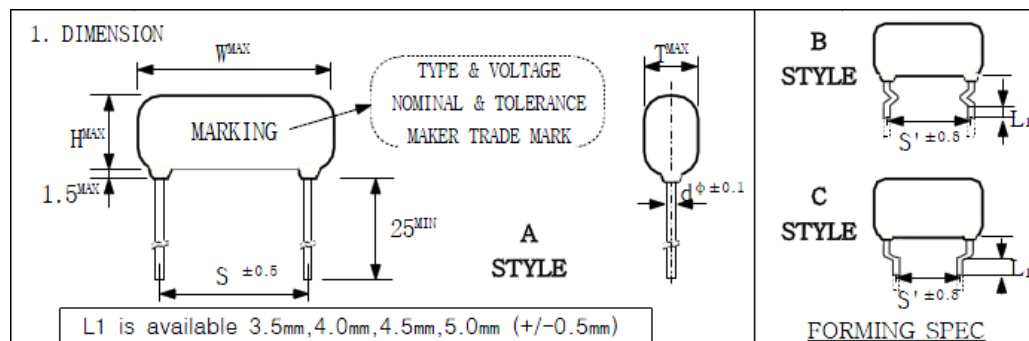

Part Code	CODE	VOLT (DC)	CAP (μ F)	TOL (%)	DIMENSIONS(mm)					FORMING SPEC		
					W	H	T	S	d(Φ)	L1	S'	STYLE
FMPE(R)450V474K15S	474	450V	0.47	±10	19.0	10.5	7.5	15.0	0.8	-	-	A-BULK
FMPE(R)450V684K15S	684	450V	0.68	±10	19.0	12.0	8.5	15.0	0.8	-	-	A-BULK
FMPE(R)450V105K15S	105	450V	1.00	±10	19.0	13.5	10.0	15.0	0.8	-	-	A-BULK
FMPE(R)450V155K15S	155	450V	1.50	±10	19.0	15.0	12.0	15.0	0.8	-	-	A-BULK
FMPE(R)450V225K15S	225	450V	2.20	±10	19.0	18.0	14.5	15.0	0.8	-	-	A-BULK
FMPE(R)450V225K22.5S	225	450V	2.20	±10	26.0	14.0	10.5	22.5	0.8	-	-	A-BULK

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

