



FMPE – SERIES Fuse Type-Metallized Polyester Film Capacitor

1. Construction

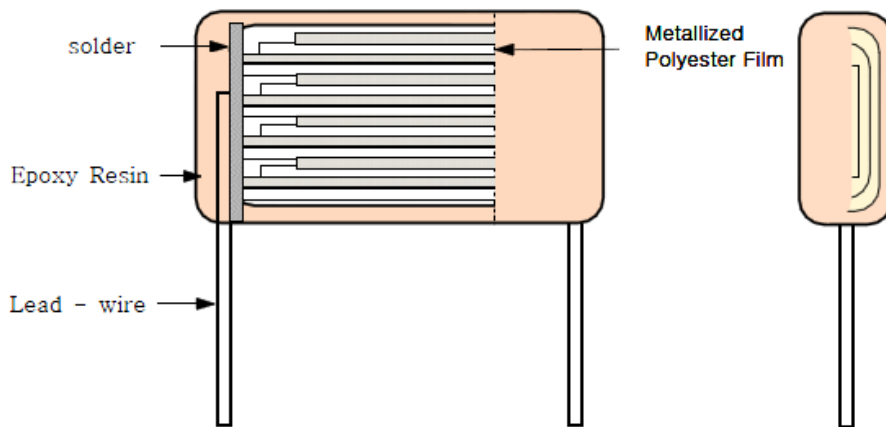


- 1 Rated Voltage: **450VDC**
- 2 Capacitance Range: **0.1uF ~ 2.2uF (104~225)**
- 3 Self Heating Temperature : The maximum allowable rise is **10°C**
- 4 Operating temperature : **-40°C ~ +85°C (+85°C ~ +110°C Derate Voltage)**

2. Reducing rated voltage for temperature

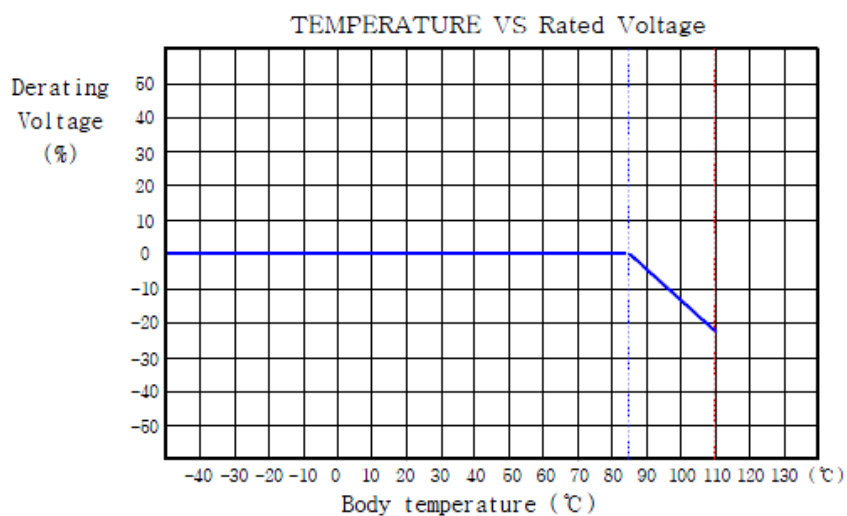

FMPE – SERIES Fuse Type-Metallized Polyester Film Capacitor

3. Dimension

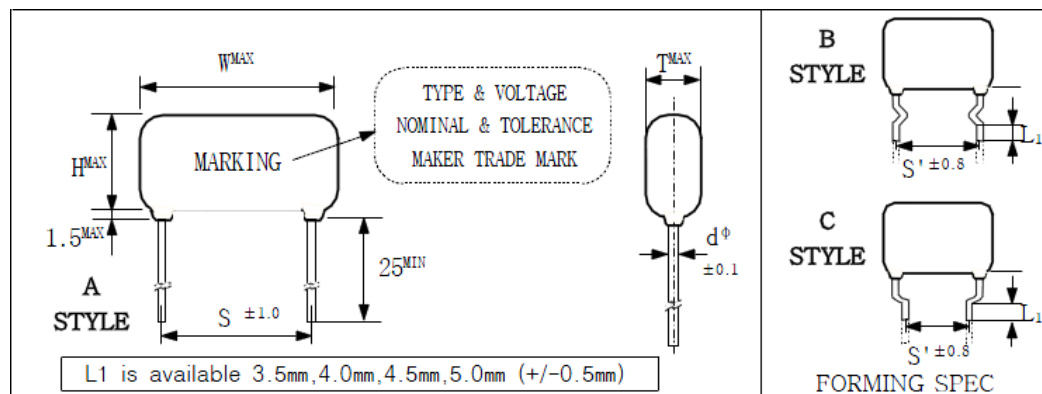

Part Code	CODE	VOLT (DC)	CAP (μ F)	TOL (%)	DIMENSIONS(mm)				
					W	H	T	S	d(Φ)
FMPE450V104K10S	104	450V	0.10	± 10	13.5	10.0	6.0	10.0	0.6
FMPE450V224K10S	224		0.22		13.5	10.5	6.0	10.0	0.6
FMPE450V334K10S	334		0.33		13.5	12.0	6.5	10.0	0.6
FMPE450V474K10S	474		0.47		13.5	16.5	6.5	10.0	0.6
FMPE450V684K10S	684		0.68		13.5	16.2	7.7	10.0	0.6
FMPE450V105K10S	105		1.00		13.5	19.2	8.3	10.0	0.6
FMPE450V474K15S	474		0.47		18.0	14.6	5.5	15.0	0.8
FMPE450V684K15S	684		0.68		18.3	16.5	5.5	15.0	0.8
FMPE450V105K15S	105		1.00		18.3	18.5	6.3	15.0	0.8
FMPE450V155K15S	155		1.50		17.8	19.2	7.0	15.0	0.8
FMPE450V225K15S	225		2.20		17.8	21.4	9.5	15.0	0.8
FMPE450V155K22S	155		1.50		26.0	16.0	7.8	22.5	0.8
FMPE450V225K22S	225	450V	2.20	± 10	26.0	18.8	7.5	22.5	0.8

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

