



FMPP(R) – SERIES Round Type-Metallized Polypropylene Film Capacitor

1. Construction

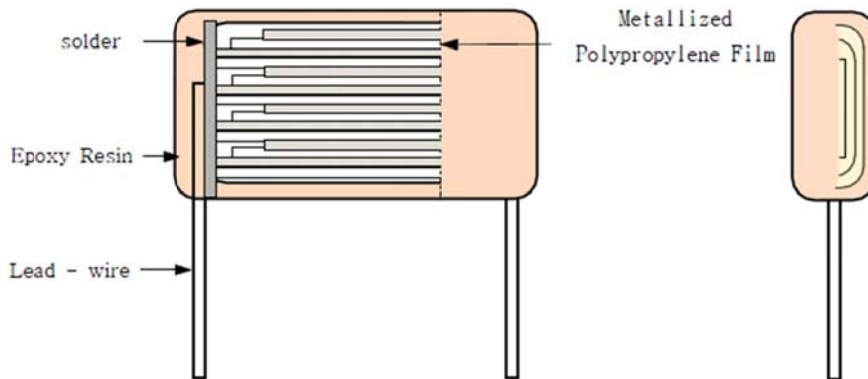


- 1 Rated Voltage: **500VDC**
- 2 Capacitance Range: **0.47uF ~ 2.2uF (474~225)**
- 3 Self Heating Temperature : The maximum allowable rise is **8°C**
- 4 Operating temperature : **-40°C ~ +105°C**

2. Reducing rated voltage for temperature

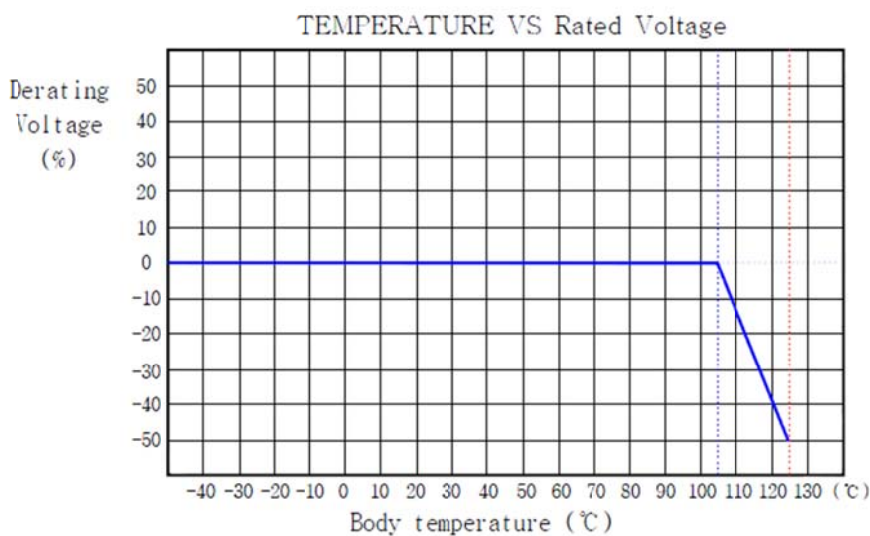

FMPP – SERIES Fuse Type-Metallized Polypropylene Film Capacitor

3. Dimension

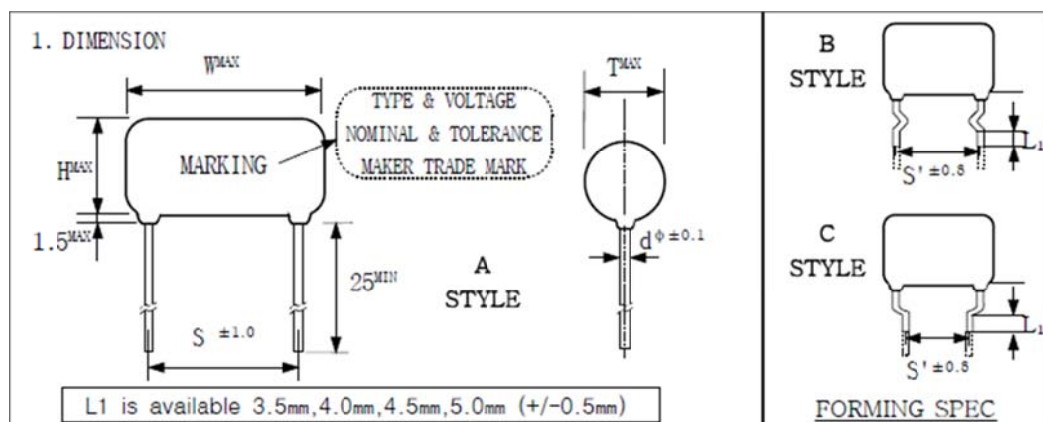

Part Code	CODE	VOLT(DC)	CAP (μ F)	TOL (%)	DIMENSIONS(mm)					FORMING SPEC		
					W	H	T	S	d(φ)	L1	S'	STYLE
FMPP(R)500V474J15S	474	500V	0.47	± 5	19.5	11.0	10.5	15.0	0.8	-	-	A-BULK
FMPP(R)500V684J15S	684		0.68	± 5	19.5	12.5	12.0	15.0	0.8	-	-	A-BULK
FMPP(R)500V105J15S	105		1.00	± 5	19.5	14.5	14.0	15.0	0.8	-	-	A-BULK
FMPP(R)500V105J22S	105		1.00	± 5	26.5	13.0	12.0	22.0	0.8	-	-	A-BULK
FMPP(R)500V155J15S	155		1.50	± 5	19.5	17.0	16.5	15.0	0.8	-	-	A-BULK
FMPP(R)500V225J22S	225	500V	2.20	± 5	28.5	18.0	17.5	22.5	0.8	-	-	A-BULK

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

