



FMPP – SERIES Fuse Type-Metallized Polypropylene Film Capacitor

1. Construction

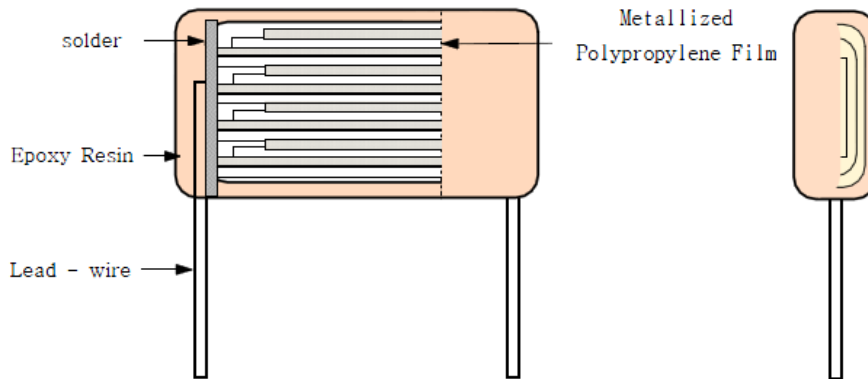


- 1 Rated Voltage: **500VDC**
- 2 Capacitance Range: **0.1uF ~ 2.2uF (104~225)**
- 3 Self Heating Temperature : The maximum allowable rise is **8°C**
- 4 Operating temperature : **-40°C ~ +105°C**

2. Reducing rated voltage for temperature

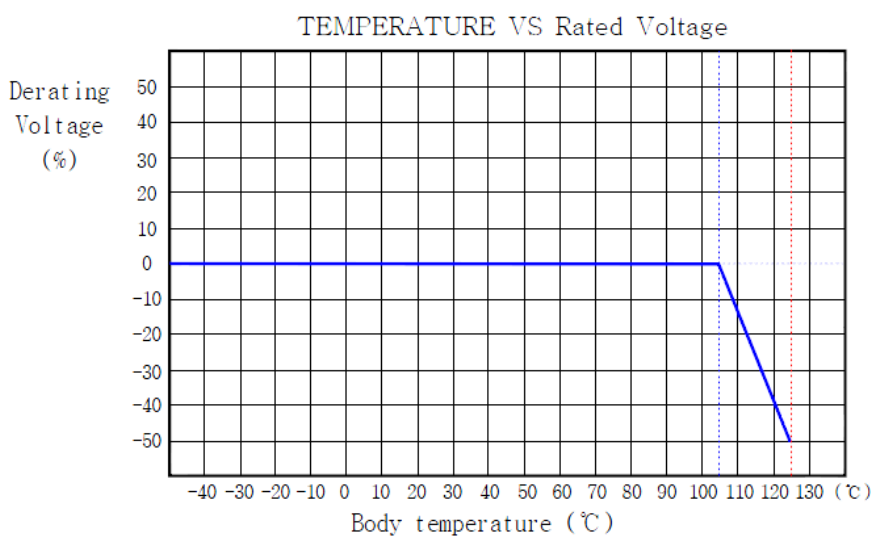

FMPP – SERIES Fuse Type-Metallized Polypropylene Film Capacitor

3. Dimension

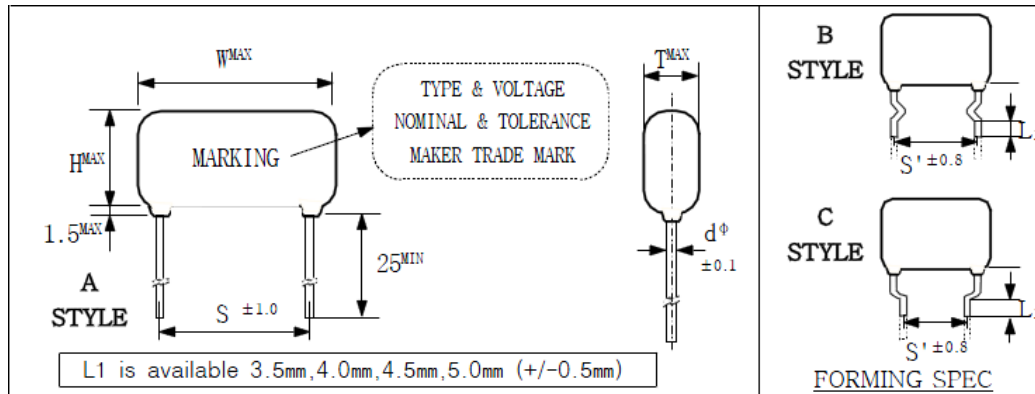

Part Code	CODE	VOLT(DC)	CAP (μF)	TOL (%)	DIMENSIONS(mm)				
					W	H	T	S	d(Φ)
FMPP500V104J10S	104	500V	0.10	± 5	13.0	9.0	6.0	10.0	0.6
FMPP500V224J10S	224		0.22	± 5	13.0	12.0	7.5	10.0	0.6
FMPP500V334J10S	334		0.33	± 5	13.0	13.5	9.0	10.0	0.6
FMPP500V474J15S	474		0.47	± 5	18.0	15.0	6.5	15.0	0.8
FMPP500V105J15S	105		1.00	± 5	18.0	19.6	9.2	15.0	0.8
FMPP500V684J15S	684		0.68	± 5	18.0	16.8	8.0	15.0	0.8
FMPP500V474J10S	474		0.47	± 5	13.0	17.3	8.4	10.0	0.6
FMPP500V155J15S	155		1.50	± 5	18.0	20.0	11.5	15.0	0.8
FMPP500V155J22S	155		1.50	± 5	25.5	19.1	8.6	22.5	0.8
FMPP500V225J22S	225	500V	2.20	± 5	25.5	21.0	10.6	22.5	0.8

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

