



MPP– SERIES Metallized Polypropylene Film Capacitor for LED lighting

1. Construction

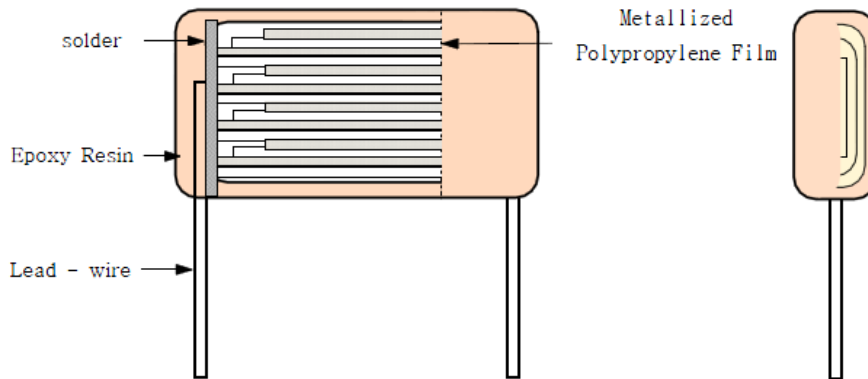


- 1 Rated Voltage: **250VDC / 450VDC**
- 2 Capacitance Range: **0.01uF ~ 0.22uF (103~224)**
- 3 Self Heating Temperature : The maximum allowable rise is **5°C**
- 4 Operating temperature : **-40°C ~ +105°C**

2. Reducing rated voltage for temperature

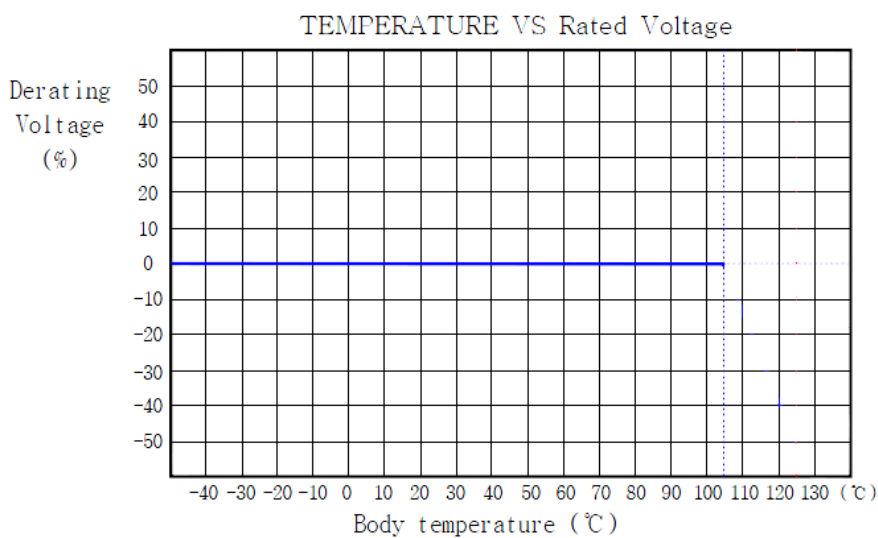

MPP– SERIES Metallized Polypropylene Film Capacitor for LED lighting

3. Dimension

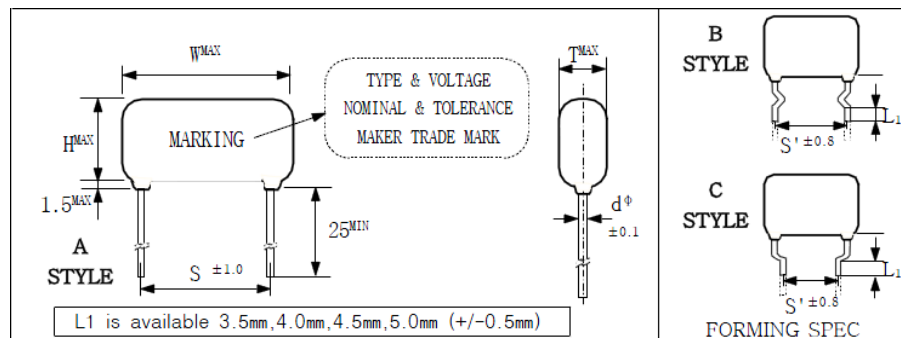

PART CODE	CODE	VOLT (DC)	CAP (μ F)	TOL (%)	DIMENSIONS(mm)				
					W	H	T	S	d(Φ)
MPP250V103J7.5S	103	250V	0.010	±5	10.5	9.0	5.5	7.5	0.6
MPP250V223J7.5S	223	250V	0.022	±5	10.5	8.5	5.0	7.5	0.6
MPP250V333J7.5S	333	250V	0.033	±5	10.5	8.5	5.5	7.5	0.6
MPP250V473J7.5S	473	250V	0.047	±5	10.5	9.0	6.0	7.5	0.6
MPP250V683J7.5S	683	250V	0.068	±5	10.5	8.5	6.5	7.5	0.6
MPP250V104J7.5S	104	250V	0.100	±5	10.5	9.5	6.5	7.5	0.6
MPP250V224J10S	224	250V	0.220	±5	13.0	11.0	6.5	10.0	0.6

PART CODE	CODE	VOLT (DC)	CAP (μ F)	TOL (%)	DIMENSIONS(mm)				
					W	H	T	S	d(Φ)
MPP450V103J10S	103	450V	0.010	±5	13.0	9.5	5.5	10.0	0.6
MPP450V223J10S	223	450V	0.022	±5	13.0	9.5	5.5	10.0	0.6
MPP450V333J10S	333	450V	0.033	±5	13.0	9.5	5.5	10.0	0.6
MPP450V473J10S	473	450V	0.047	±5	13.0	11.0	6.0	10.0	0.6
MPP450V683J10S	683	450V	0.068	±5	13.0	12.5	6.5	10.0	0.6
MPP450V104K10S	104	450V	0.100	±10	13.0	10.0	5.0	10.0	0.6
MPP450V154K10S	154	450V	0.150	±10	13.0	11.0	6.0	10.0	0.6
MPP450V224K10S	224	450V	0.220	±10	13.0	13.0	7.0	10.0	0.6
MPP450V334K10S	334	450V	0.330	±10	13.0	16.0	8.0	10.0	0.6

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

