



NPPS – SERIES FILM-FOIL / POLYPROPYLENE FILM / METAL FILM CAPACITORS

1. Construction

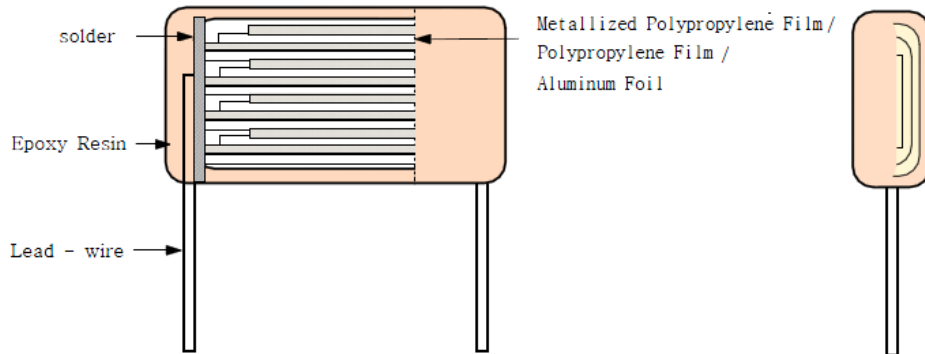


- 1 Rated Voltage: **1000VDC / 450VAC**
- 2 Capacitance Range: **0.001 μ F ~ 0.1 μ F (10²~10⁴)**
- 3 Self Heating Temperature : $-40 \leq X < +85(^{\circ}\text{C})$ - **12 $^{\circ}\text{C}$** or less
(The maximum allowable Temp) $+85 \leq X < +110(^{\circ}\text{C})$ - **8 $^{\circ}\text{C}$** or less
- 4 Operating temperature : **-40 $^{\circ}\text{C}$ ~ +110 $^{\circ}\text{C}$**

2. Reducing rated voltage for temperature

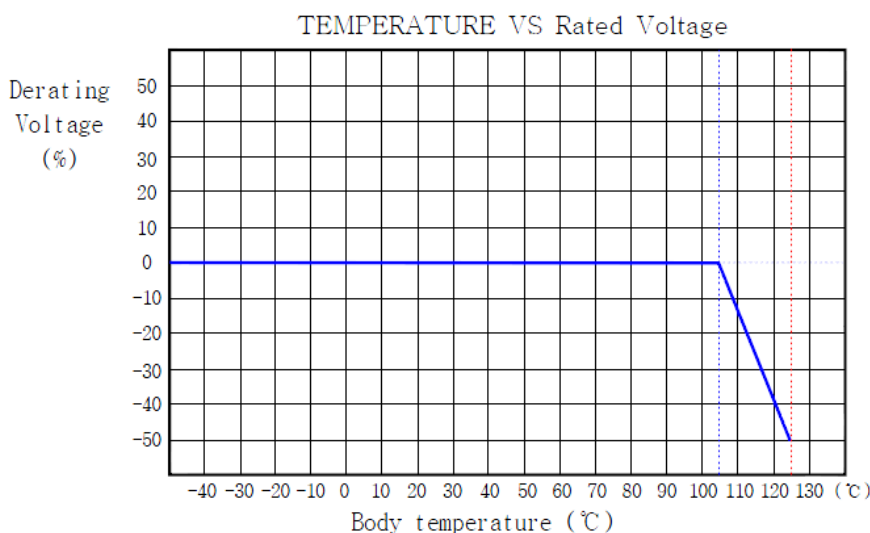

NPPS – SERIES FILM-FOIL / POLYPROPYLENE FILM / METAL FILM CAPACITORS

3. Dimension

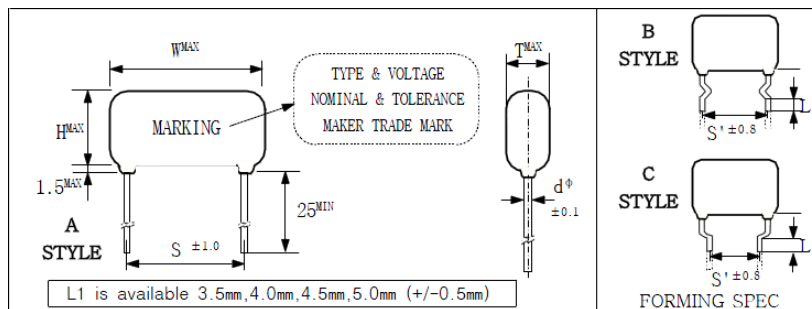

NPPS1000V102J1S	102	1000	0.0010	±5	18.0	10.0	6.0	15.0	0.8
NPPS1000V112J1S	112	1000	0.0011	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V122J1S	122	1000	0.0012	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V132J1S	132	1000	0.0013	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V152J1S	152	1000	0.0015	±5	18.0	11.0	6.5	15.0	0.8
NPPS1000V162J1S	162	1000	0.0016	±5	18.0	11.0	6.5	15.0	0.8
NPPS1000V182J1S	182	1000	0.0018	±5	18.0	11.0	7.0	15.0	0.8
NPPS1000V202J1S	202	1000	0.0020	±5	18.0	11.0	7.0	15.0	0.8
NPPS1000V222J1S	222	1000	0.0022	±5	18.0	11.0	7.5	15.0	0.8
NPPS1000V242J1S	242	1000	0.0024	±5	18.0	11.0	7.5	15.0	0.8
NPPS1000V272J1S	272	1000	0.0027	±5	18.0	10.0	6.0	15.0	0.8
NPPS1000V302J1S	302	1000	0.0030	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V332J1S	332	1000	0.0033	±5	18.0	10.0	6.0	15.0	0.8
NPPS1000V362J1S	362	1000	0.0036	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V392J1S	392	1000	0.0039	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V432J1S	432	1000	0.0043	±5	18.0	11.0	6.0	15.0	0.8
NPPS1000V472J1S	472	1000	0.0047	±5	18.0	11.0	6.0	15.0	0.8
NPPS1000V512J1S	512	1000	0.0051	±5	18.0	11.0	6.0	15.0	0.8
NPPS1000V562J1S	562	1000	0.0056	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V622J1S	622	1000	0.0062	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V682J1S	682	1000	0.0068	±5	18.0	10.5	6.0	15.0	0.8
NPPS1000V752J1S	752	1000	0.0075	±5	18.0	11.5	6.0	15.0	0.8
NPPS1000V822J1S	822	1000	0.0082	±5	18.0	12.0	6.5	15.0	0.8
NPPS1000V912J1S	912	1000	0.0091	±5	18.0	12.5	7.0	15.0	0.8
NPPS1000V103J1S	103	1000	0.0100	±5	18.0	12.5	7.0	15.0	0.8
NPPS1000V113J1S	113	1000	0.0110	±5	18.0	13.0	7.5	15.0	0.8
NPPS1000V123J1S	123	1000	0.0120	±5	18.0	13.0	7.5	15.0	0.8
NPPS1000V133J1S	133	1000	0.0130	±5	18.0	13.5	8.0	15.0	0.8
NPPS1000V153J1S	153	1000	0.0150	±5	18.0	14.0	7.0	15.0	0.8
NPPS1000V163J1S	163	1000	0.0160	±5	18.0	14.0	7.5	15.0	0.8
NPPS1000V183J1S	183	1000	0.0180	±5	18.0	14.0	7.5	15.0	0.8
NPPS1000V203J1S	203	1000	0.0200	±5	18.0	14.0	8.0	15.0	0.8
NPPS1000V223J1S	223	1000	0.0220	±5	18.0	14.0	8.5	15.0	0.8
NPPS1000V243J1S	243	1000	0.0240	±5	18.0	14.0	8.5	15.0	0.8
NPPS1000V273J1S	273	1000	0.0270	±5	18.0	14.5	7.5	15.0	0.8
NPPS1000V303J1S	303	1000	0.0300	±5	18.0	14.5	9.5	15.0	0.8
NPPS1000V333J1S	333	1000	0.0330	±5	18.0	15.0	10.0	15.0	0.8
NPPS1000V363J1S	363	1000	0.0360	±5	18.0	15.5	10.5	15.0	0.8
NPPS1000V393J1S	393	1000	0.0390	±5	18.0	16.0	10.5	15.0	0.8
NPPS1000V433J1S	433	1000	0.0430	±5	18.0	16.5	11.0	15.0	0.8
NPPS1000V433J20S	433	1000	0.0430	±5	22.5	19.0	11.5	20.0	0.8
NPPS1000V473J1S	473	1000	0.0470	±5	18.0	17.0	11.5	15.0	0.8
NPPS1000V513J1S	513	1000	0.0510	±5	18.0	17.5	12.0	15.0	0.8
NPPS1000V563J1S	563	1000	0.0560	±5	18.0	18.0	12.5	15.0	0.8
NPPS1000V823J17.5S	823	1000	0.0820	±5	20.0	17.5	11.5	17.5	0.8

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

