



NPPS – SERIES FILM-FOIL / POLYPROPYLENE FILM / METAL FILM CAPACITORS

1. Construction

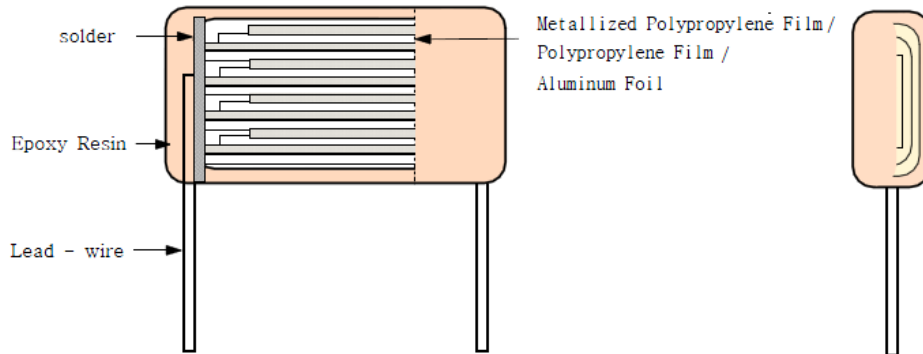


- 1 Rated Voltage: **800VDC / 350VAC**
- 2 Capacitance Range: **0.01 μ F ~ 0.1 μ F (103~104)**
- 3 Self Heating Temperature : $-40 \leq X < +85(^{\circ}\text{C})$ - **12 $^{\circ}\text{C}$** or less
(The maximum allowable Temp) $+85 \leq X < +110(^{\circ}\text{C})$ - **8 $^{\circ}\text{C}$** or less
- 4 Operating temperature : **-40 $^{\circ}\text{C}$ ~ +110 $^{\circ}\text{C}$**

2. Reducing rated voltage for temperature

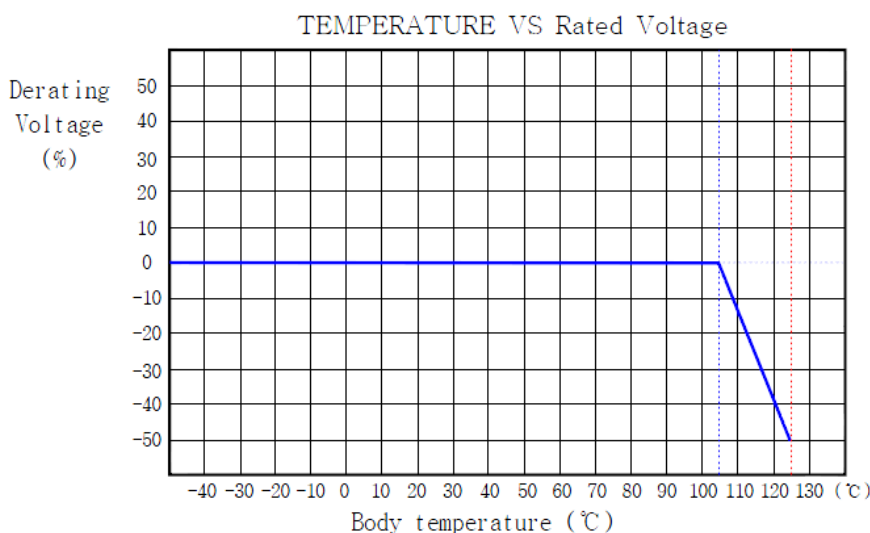

NPPS – SERIES FILM-FOIL / POLYPROPYLENE FILM / METAL FILM CAPACITORS

3. Dimension

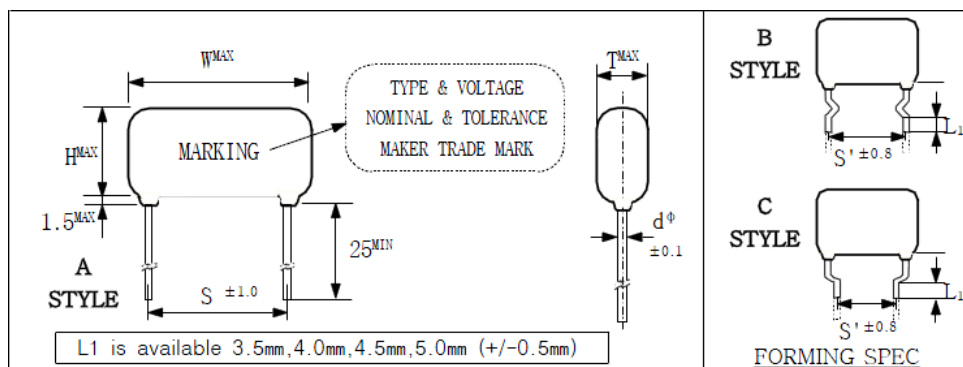

NPPS800V103J15S	103	800	0.010	±5	18.5	9.5	6.0	15.0	0.8
NPPS800V113J15S	113	800	0.011	±5	18.5	9.5	6.0	15.0	0.8
NPPS800V123J15S	123	800	0.012	±5	18.5	11.0	6.0	15.0	0.8
NPPS800V133J15S	133	800	0.013	±5	18.5	11.0	6.0	15.0	0.8
NPPS800V153J15S	153	800	0.015	±5	18.5	9.5	6.0	15.0	0.8
NPPS800V163J15S	163	800	0.016	±5	18.5	10.0	6.0	15.0	0.8
NPPS800V183J15S	183	800	0.018	±5	18.5	11.0	6.0	15.0	0.8
NPPS800V203J15S	203	800	0.020	±5	18.5	11.0	6.0	15.0	0.8
NPPS800V223J15S	223	800	0.022	±5	18.5	11.5	6.0	15.0	0.8
NPPS800V243J15S	243	800	0.024	±5	18.5	12.5	6.5	15.0	0.8
NPPS800V273J15S	273	800	0.027	±5	18.5	12.5	7.0	15.0	0.8
NPPS800V303J15S	303	800	0.030	±5	18.5	12.5	7.0	15.0	0.8
NPPS800V333J20S	333	800	0.033	±5	24.5	11.5	6.5	20.0	0.8
NPPS800V363J20S	363	800	0.036	±5	24.5	12.0	6.5	20.0	0.8
NPPS800V393J20S	393	800	0.039	±5	24.5	12.0	7.0	20.0	0.8
NPPS800V433J20S	433	800	0.043	±5	24.5	14.0	7.0	20.0	0.8
NPPS800V473J20S	473	800	0.047	±5	24.5	14.0	7.5	20.0	0.8
NPPS800V513J20S	513	800	0.051	±5	24.5	13.0	7.5	20.0	0.8
NPPS800V563J20S	563	800	0.056	±5	24.5	14.0	7.5	20.0	0.8
NPPS800V623J20S	623	800	0.062	±5	23.5	17.0	7.5	20.0	0.8
NPPS800V683J20S	683	800	0.068	±5	24.5	17.0	7.0	20.0	0.8
NPPS800V753J20S	753	800	0.075	±5	24.5	17.5	7.5	20.0	0.8
NPPS800V823J20S	823	800	0.082	±5	24.5	17.5	7.5	20.0	0.8
NPPS800V913J20S	913	800	0.091	±5	24.5	18.0	8.0	20.0	0.8
NPPS800V104J20S	104	800	0.100	±5	24.5	18.5	8.5	20.0	0.8

上述規格為一般常用規格，若不符合您的需求請隨時與我們連絡！

4. Type Designation

